

L-BL

SERIES

CONNECTION: **FRONT**
TERMINAL TYPE: **SCREW**
MOUNTING: **PANEL**

SUITABLE FOR




OVERVIEW

- Cable secured with removable screws
- Panel mounting
- Sturdy construction, no internal soldering
- Excellent contact pressure on relay terminals
- Inputs for maximum section 2.5 mm²
- Provision for fitment of keying pins
- Provision for fitment or retaining clip
- Protection IP10

MODELS




50L

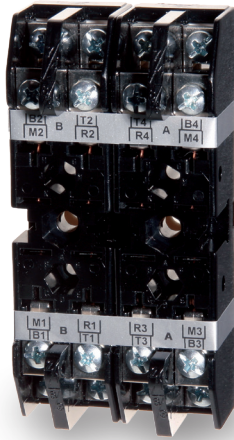

48BL



78BL

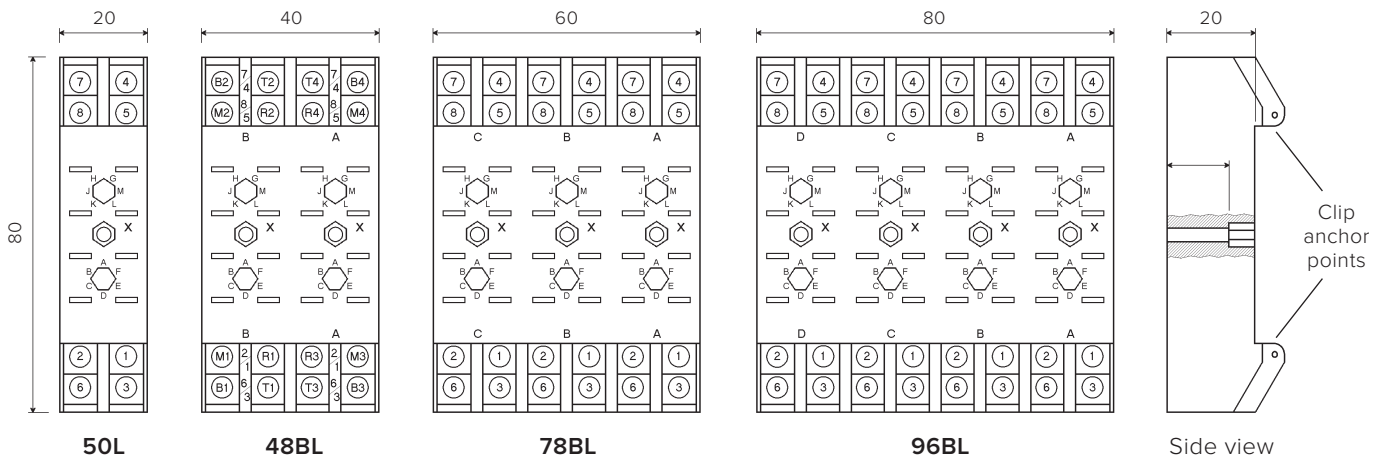

X = Fixing holes

SPECIFICATIONS

Weight: 36 / 72 / 108 / 144 g
Operating temperature: -25°C...+70°C
Storage temperature: -40°C...+85°C
Panel mounting:
 • ϕ holes: 4.2 mm
 • centre distance between adjacent holes: 20 mm
Degree of protection: IP10
Dielectric strength: 2.5 kV 50 Hz for 1 min

Type and size of screw: M3 thread, cross head
 Removable screw for use with eyelet terminals
Tightening torque: 0.5...0.8 Nm
Width of slot: 7.1 mm
Maximum section of cable: 2 x 2.5 mm²
Fire resistance: EN60695-2-1, UL94 - V0, EN45545-2
Standards: EN60255, EN60947, EN61810, EN61373